




AX17251 SERIES

External Dimensions

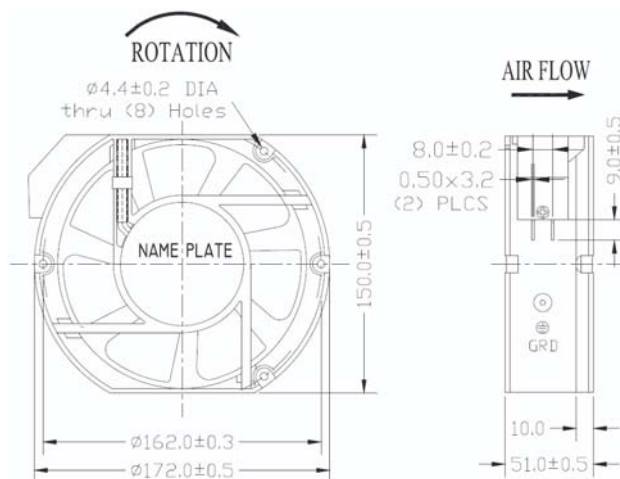

Frame: Aluminum Alloy
 Impeller: Plastic (UL: 94V-0)
 Bearing: Ball, Sleeve bearing
 Lead wire: UL1015AWG22
 OPERATING TEMP*: -10C~70C
 *: -10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)


*: Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: $\odot$ =Ball $\otimes$ =Sleeve $\circ$ =1B1S $\bullet$ =Hypro bearing


Frame size (mm)	Model No.	Bearing System Type	Volt./Freq. (VAC/Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
172x150x51	AX17511HB-C	$\odot$	115/50	0.37	43.40	2800	6.792 240.0	0.670 17.018	56.0	970
			115/60	0.39	45.00	3200	7.641 270.0	0.720 18.288	61.0	
	AX17512HB-C	$\odot$	230/50	0.17	39.70	2800	6.792 240.0	0.670 17.018	56.0	
			230/60	0.18	41.40	3200	7.641 270.0	0.720 18.288	61.0	

Specifications subject to change without notice.

115V

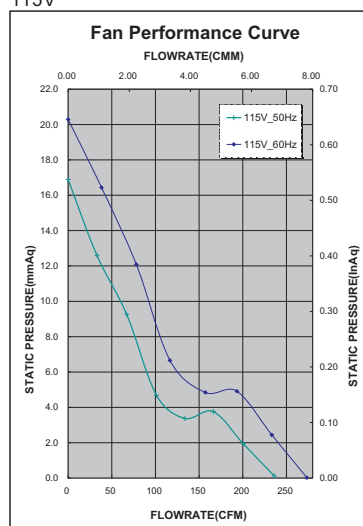

230V

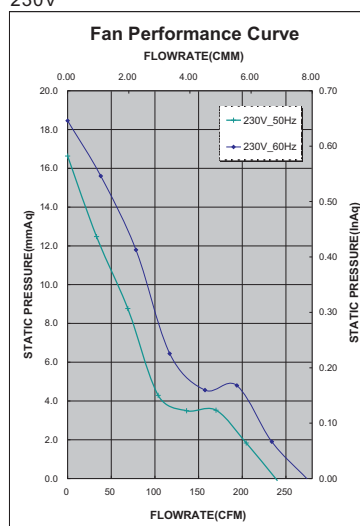

*Safety approvals
115V

✓	✓			

230V

✓	✓		✓	✓